



Digital Outputs
HE450DQM601
24VDC Out, Negative Logic
16 Outputs

SmartStix

For electronic information including the GSD File, see www.SmartStix.com.
 This product has a Programming Reference (SUP0552).


1 SPECIFICATIONS

Outputs				
Number of output points	16	External Power Supply	Voltage	24VDC \pm 10%(ripple voltage: 4Vp-p or less)
Commons per Module	1		Current	30mA (TYP, All points ON)
Operating Voltage	24VDC	OFF to ON Response		2ms.
Rated Load Voltage	24VDC	ON to OFF Response		2ms.
Maximum Load Current per channel	0.1A Max. per output 2A per common	Output Type		Sinking
OFF Leakage Current	0.1mA or less	Common Method		16 points / COM
Maximum Inrush Current per channel	0.4A, 10ms.	Operating Indicator		LED turns on during ON state of output
		External connections		Terminal block connector (M3 x 6 screws)
Maximum Voltage Drop during ON circuit	1.5VDC(0.5A)	Isolation methods		Photo Coupler
General Specifications				
Storage Temperature	-25° to 70° C	Altitude for use		Up to 2,000m
Operating Temperature	0° to 55° C	Pollution degree		2 or lower
Atmosphere	Free from corrosive gases and excessive dust	Internal power Consumption (mA)		280
Operating and Storage Humidity	5 to 95% Non-condensing	Weight		5.6 oz. (160g)
Cooling method	Self-cooling			

MAN0531-02


Vibration				
Occasional Vibration				
Frequency	Acceleration	Amplitude	Sweep Count	
10 ≤ f < 57 Hz	-	0.075 mm	10 times in each direction for X,Y,Z	
57 ≤ f ≤ 150 Hz	9.8 m/s ² {1G}	-		
Continuous Vibration				
Frequency	Acceleration	Amplitude	Sweep Count	
10 ≤ f < 57 Hz	-	0.035 mm	10 times in each direction for X,Y,Z	
57 ≤ f ≤ 150 Hz	4.9 m/s ² {0.5G}	-		
Shocks				
Maximum shock acceleration		147 m/s ² {15G}		
Duration Time		11 ms.		
Pulse Wave		Half sine wave pulse (3 times in each of X, Y, Z directions)		
Noise Immunity				
Square wave impulse noise		AC: ± 1,500VDC DC: ± 900VDC		
Electrostatic Discharge		Voltage: 4kV (contact discharge)		
Radiated electromagnetic field		27 – 500MHz, 10V/m		
Fast Transient Burst Noise	Severity level	All power modules	Digital I/Os (Ue ≥ 24V)	Digital I/Os (Ue < 24 V) Analog I/Os Communication I/Os
	Voltage	2 kV	1 kV	0.25 kV

2 DIMENSIONS

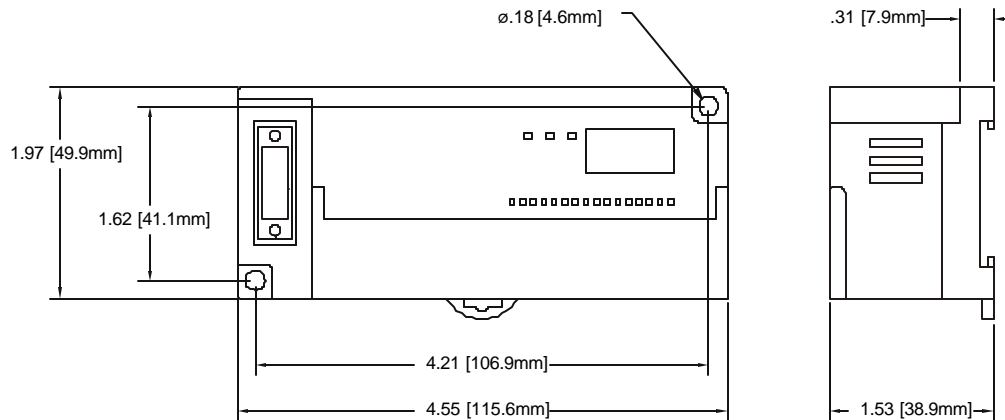


006ACC001

3 WIRING

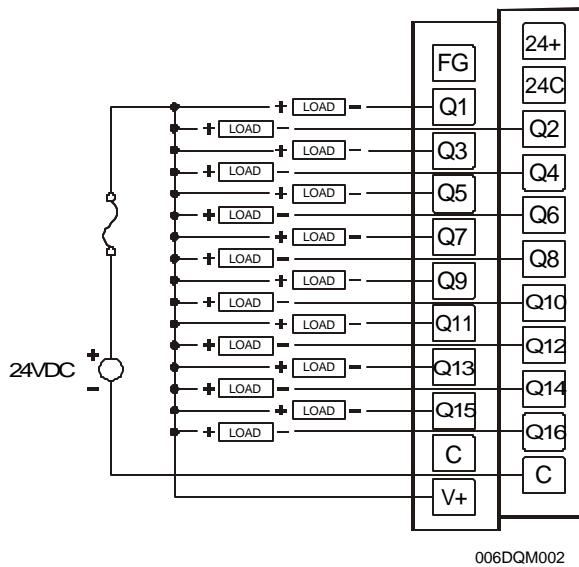

Pin	Signal DQM601
24+	24V Power Supply
24C	Power Supply Return
FG	Frame Ground
Q1	Output 1
Q2	Output 2
Q3	Output 3
Q4	Output 4
Q5	Output 5
Q6	Output 6
Q7	Output 7
Q8	Output 8
Q9	Output 9
Q10	Output 10
Q11	Output 11
Q12	Output 12
Q13	Output 13
Q14	Output 14
Q15	Output 15
Q16	Output 16
C	Isolated Common
C	Isolated Common
V+	Isolator Power


4 INTERNAL WIRING

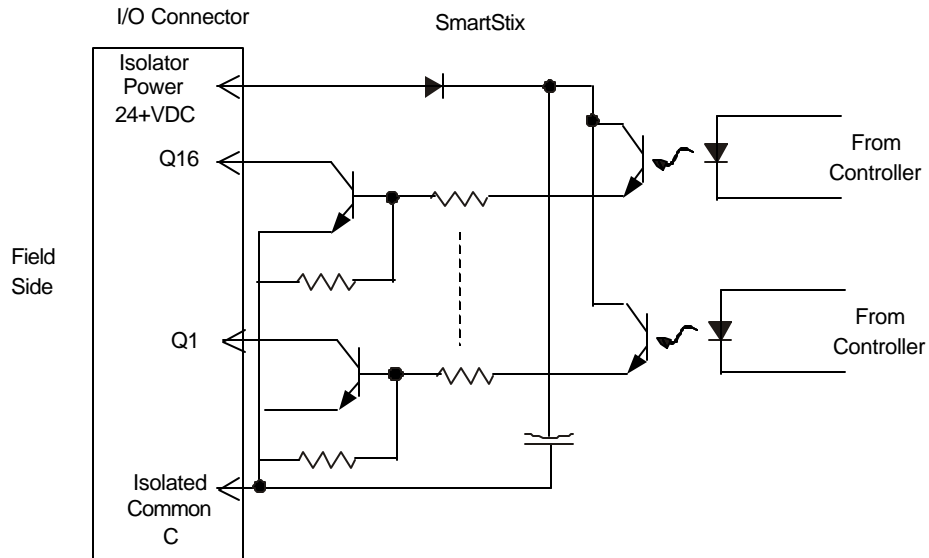

5 SWITCHES

Setting Address Switches:

Profibus addresses are set using the decimal number system from 1 to 99. Set a unique Network ID by inserting a small Phillips screwdriver into the two *identical* switches as shown in the example.

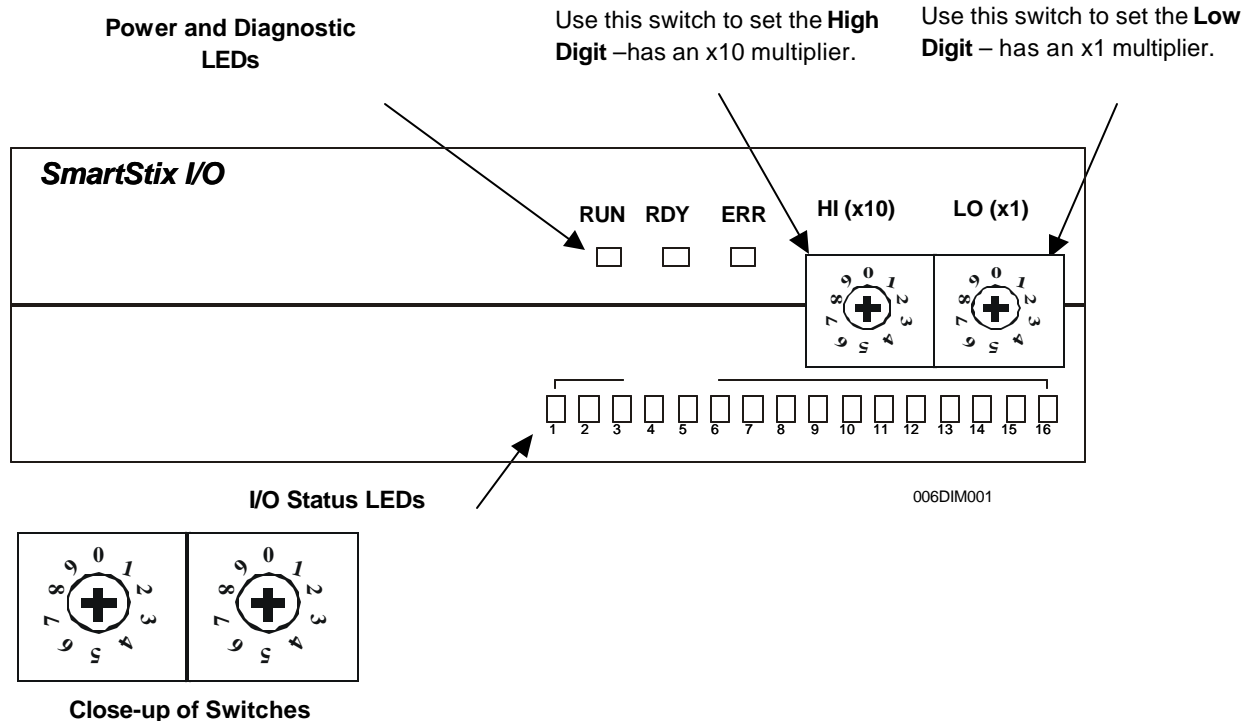


6 LEDs

Communication LED	MEANING
RUN	Displays the status of the power
RDY	Displays the communication status of the communication module
ERR	Displays abnormal condition of communication module

7 NETWORK CABLE


For detailed network information, refer to www.profibus.org.

- a. A SmartStix module uses a 9-pin D-sub plug connector for its DP port. The pin assignment of the plug connector and the wiring are shown below.

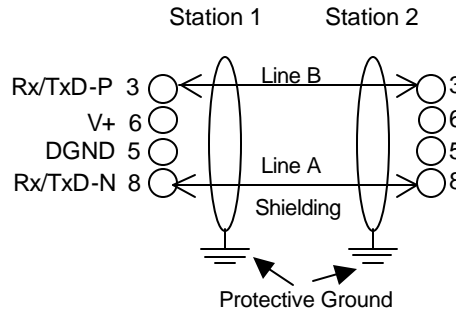

- b. It is necessary to terminate both ends of the network. Both terminations must have power to them to insure proper operation of the network. The following diagram illustrates the correct connection for the termination resistors. The diagram is for illustrative purposes only.

Note: Cabling and connectors need to be PTO-approved to achieve the desired performance results.

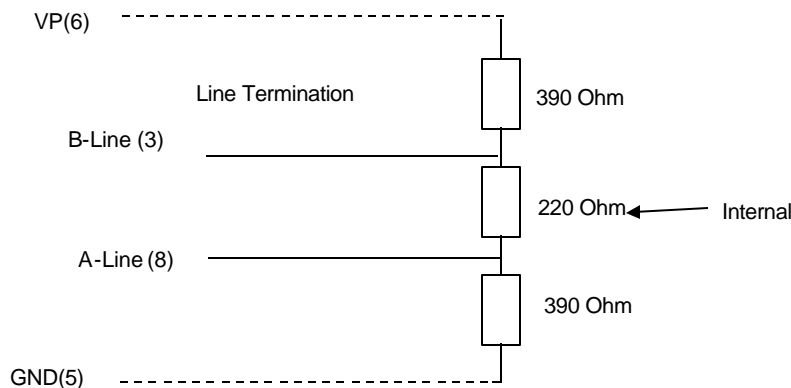

- c. The shield braiding (and if present, the shield foil) must be connected to protective ground on both sides and must have good conductivity via shield clamps that cover as large an area as possible. In addition, it is recommended that the data lines be kept separate from all high-voltage cables.

8 INSTALLATION / SAFETY

- a. All applicable codes and standards need to be followed in the installation of this product.
- b. For I/O wiring (discrete), use the following wire type or equivalent: Belden 9918, 18 AWG or larger.



Warning: Consult user documentation.



Warning: Electrical Shock Hazard.

9 TECHNICAL ASSISTANCE

For assistance, contact Technical Support at the following locations:

North America:

(317) 916-4274

www.heapg.com

Europe:

(+) 353-21-4321-266

www.horner-apg.com