

# Operator Control Station HE5000CS200 / OCS210 Products Specifications

and Installation Data

The following information is taken from the *Control Station Hardware Manual* (MAN0227). To obtain user manual updates, visit our web site at www.heapg.com.

# **1** SPECIFICATIONS

Table 1 – OCS200/210 Specifications					
Memory	OCS200 OCS210				
Ladder Memory	64K	128K			
Screen Memory	64K	128K			
Register Memory	8K	24K			
Ladder Execution					
Typical Execution Speed	0.7 ms. per 1K of boolean logic.				
Primary Power Range*	10-30				
Primary Serial	Standard 9 pin RS-232 for programming, monitoring, and network administration. Modbus/RTU Master, Slave, ASCII Send and Receive, and CsCAN Serial also supported.				
CAN Power Range	12 – 25 VDC				
CAN Power Current	75mA m				
CAN Network	CsCAN Network / DeviceNet Slave				
Input / Output					
Keypad	Faceplate made of Autotex® polyester by Autotype®. The material is resistant to most corrosive substances found in industrial environments. The material also holds up well in most industrial conditions. If used outdoors, the material can yellow or crack.				
UL	Class I, Groups A, B, C, D, Division 2				
CE	Yes				
Operating Temperature	0°C to +60°C **				
Typical Power Draw (OCS200)*	180mA @ 24VDC				
Inrush Current *	270mA @ 24VDC for 1S				
Humidity	5% to 95% non-condensing				
	NEMA 4, 12				
NEMA Standard	(Note: UL NEMA 4, 4x, 12 available as an option for OCS100 / 110,				
	OCS200 / 210. This option is highly recommended for wash down environment.)				
Height	7.17" (18)	2			
Width	· · · · · · · · · · · · · · · · · · ·	,			
Mounting Depth	9.05" (229.84 mm) 2.00" (50.80 mm)				
User Keys		2			
Keypad	-	—			
	12 user-programmable keys + Shift, Esc, Enter, 4 direction keys and a full numeric keypad				
Display	4x20 LCD w/backlight ; 4.84w x 8.06h	mm characters			
SmartStack Modules can be found in th	emperature range of 0°C to +60°C, such temp	•			

# 2 INSTALLATION

#### 2.1 Panel Cut-Out

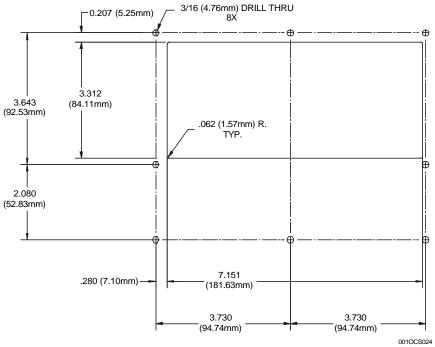



Figure 1 – Panel Cut-Out for the OCS200 / OCS210

### 2.2 Ports, Connectors and Wiring

#### 2.2.1 Primary Power Port

Table 2 – Primary Power Port Pins				
Pin	Signal	Description		
1	V+	Input power supply voltage		
2	V-	Input power supply ground		







Figure 2 Power Connector (Primary Power Port)




Note: Power Supply Voltage Range is from 10-30 VDC.


**Warning:** To provide maximum noise immunity and to ensure minimum EMI radiation, the V-signal (DC power return) need to be connected to earth ground at the power supply. The user must ensure that the power supply selected is compatible with this method of grounding.

2.2.2 CAN / DeviceNet Network Port and Wiring

#### a. Network Connector

Table 3 – CAN Port Pins				
Pin	Signal	Description		
1	V-	Power -		
2	CN_L	Signal -		
3	SHLD	Shield		
4	CN_H	Signal +		
5	V+	Power +		





### Figure 4– Network Connector

Figure 5– As viewed at the OCS

**Warning:** To provide maximum noise immunity and to ensure minimum EMI radiation, the V-signal (DC power return) need to be connected to earth ground at the power supply. The user must ensure that the power supply selected is compatible with this method of grounding.

b. Grounding

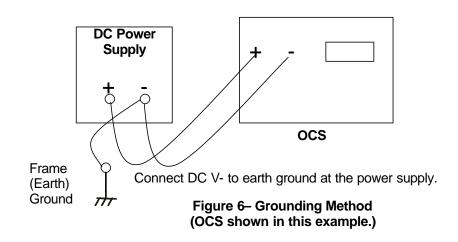


Table 4– RS-232 Port Pins					
Pin	Signal	Description	Direction		
1	DCD	Always high	Out		
2	RXD	Received Data	Out		
3	TXD	Transmitted Data	In		
4	DTR	Data Terminal Ready	In		
5	GND	Ground	-		
6	DSR	Data Set Ready	Out		
7	RTS	Request to Send	In		
8	CTS	Clear to Send	Out		
9	RI	Ring Indicate	Out		

### 2.2.3 RS-232 Programming Port and Wiring




Figure 7 – RS-232 Port

The OCS units feature an RS-232 port (Programming/Debug) for connection to a personal computer. This port is used for the purposes of OCS programming, configuring, monitoring, and debugging. This port can also be used for general ladder logic controlled serial communications to printers, modems, terminals, etc. When ladder has control of this port, it is not available for programming or debugging. The wiring diagram for the RS-232 port is shown in Figure 8. If a permanent connection is to be made between the OCS and the personal computer, the use of a shielded, multiple conductor wire with a maximum length of 15.24 meters (50 feet) enables proper performance.

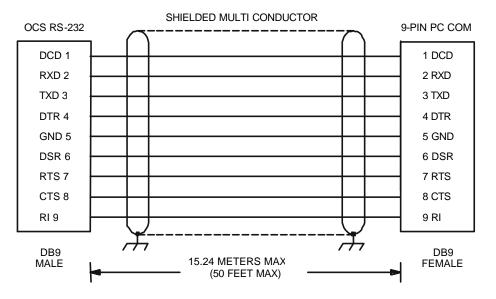


Figure 8- OCS to PC Wiring Diagram

# 3 SAFETY

All applicable codes and standards need to be followed in the installation of this product.

# 4 TECHNICAL ASSISTANCE

For manual updates and assistance, contact Technical Support at the following locations:

### North America:

(317) 916-4274 or visit our website at www.heapg.com.

Europe: (+) 353-21-4321-266 NOTES